


1 STEP STAIR UNIT SPECIFICATIONS

CONSTRUCTION

- Schedule 10 steel pipe, steel tube, steel flatbar, and 6005-T5 aluminum extrusion.
- Non-marring Neoprene foot pad.
- 11 ¾"W x 36"L x 31/32 9-ply marine grade Douglas Fir plywood with a 0.050 quad ripple Polypropylene applied to the top surface and a 0.020 Polypropylene applied to the bottom / COF Value: 0.83.



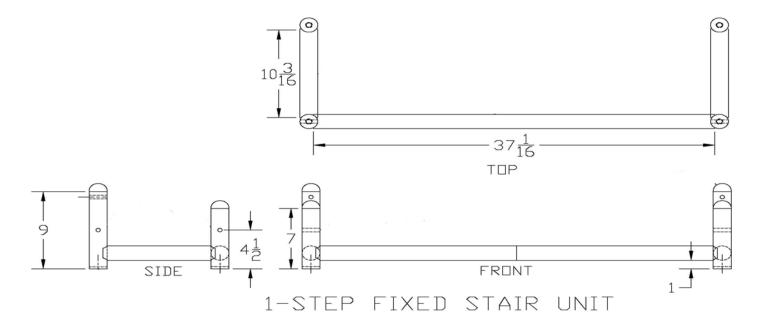

67 Industrial Blvd. ~ New Castle, DE 19720 1-866-591-3471 Toll Free ~ 302-328-4100 ~ 302-328-1034 Fax www.stagingdimensionsinc.com

1 STEP STAIR UNIT SPECIFICATIONS – (Continued)

FEATURES

- Attaches to stage using teardrop cam device and t-knob.
- Requires no tools for installation or removal.
- Base has two (2") inch diameter leveling feet with three (3") inches of fine adjustment.
- Can be used as a freestanding stair or can be attached to stage deck.
- Standard black wrinkle powder-coating or custom colors available.





